



BOBIL VANS PLUMBING KITS INSTALLATION INSTRUCTIONS





What comes in the box?

Thank you for purchasing this plumbing kit! In this kit you will receive everything you need to connect a full water system from diaphragm pump to outlet.

Kitchen Tap Kit Contents:

- Seaflo 20 PSI Pump + Filter
- Seaflo Accumulator, 10cms blue hose & 3 jubilee clips to connect to the pump
- John Guest 12mm Pushfit Pipe (6m blue, 4m red)
- Pipe Inserts for hot water pipe (x2)
- 1/2" Female to JG Fitting (x2)
- 1/2" Male to JG Fitting (x3)
- Y Splitter (x1) & T Splitter (x1)
- John Guest Stop Valve (x2)
- Pipe clips (x 10)

Shower Kit Contents:

- Shurflo 20 PSI Pump + Filter
- Seaflo Accumulator, 10cms blue hose & 3 jubilee clips to connect to the pump
- John Guest 12mm Pushfit pipe (10m blue, 6m red)
- Pipe Inserts for hot water pipe (x6)
- 1/2" Female to JG Fitting (x2)
- 1/2" Male to JG Fitting (x3)
- T Splitter (x3) + Y Splitter (x1)
- John Guest Stop Valve (x2)
- Shower Mixer Easy Fit Kit
- 15mm to 12mm stem Reducer (x2)
- 15mm Elbows (x2)
- 15mm Pipe (30cm)
- 15mm pipe inserts (x4)
- Pipe clips (x 16)

Extras

- If you have purchased the kit with an electric tank, then one of the male fittings will be substituted for a female.
- If you have ordered the expansion tank addon, you will also receive an extra tee, 5 more pipe inserts and 1/2" Female fitting to connect to the expansion tank.

Thank you for buying our products!

Small businesses like ours only exist because of the support of our customers. We appreciate you purchasing from us, and hope that you have a great experience.


If you have any installation questions or queries then just get in touch, we're here to help. Contact us at info@bobilvans.co.uk or on the phone at +44 1275 261074



Installation

John Guest 12mm pushfit pipe is a simple system - cut the pipe to length, and push into place. John Guest pipe is flexible as well, to a degree, and we recommend using this flexibility, rather than adding additional restrictions like elbow's unless necessary.


- Ensure pipes are cut square, without any burrs, and pushed firmly in.
- If you need to demount the pipe, push the collar in and pull the pipe out.
- Push the pipe inserts into the end of each hot pipe.
- If you ordered the expansion tank addon, this T's into the hot line.
- The accumulator tank is set at 10psi. Normally, this is ok however you can reduce
 the pressure if the flow is still not smooth. 3psi above the pump start-up pressure
 is recommended (which is normally around 65% of the shut off pressure printed on
 the pump), but it is definitely not an exact science, so trial and error is encouraged.

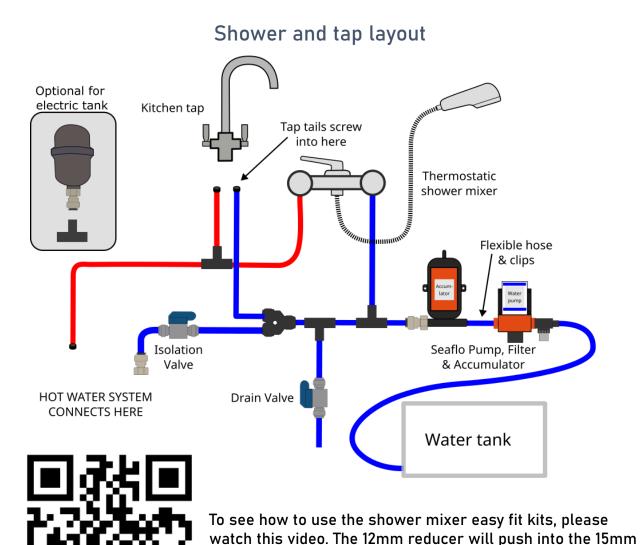

elbow which you can fit on the back of your easy fix kit. To fit the mixer with the pipe inserts, you may need to push the

pipe through the olive before tightening the olive.



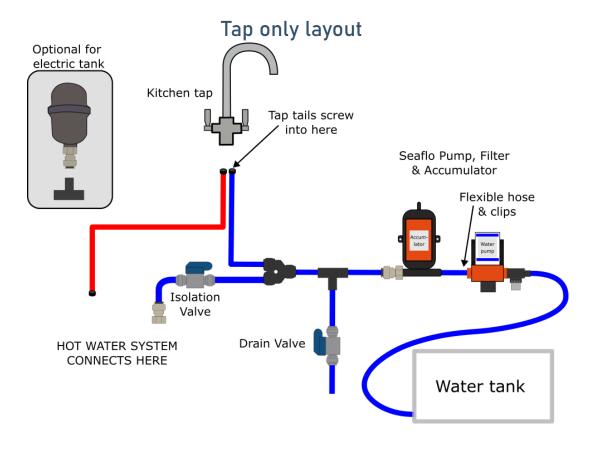

We would love to know what you think!

Please let us know by leaving a review through the link sent through when you made your purchase, or email us at info@bobilvans.co.uk!

You can also share photos of your installation on the 'Bobil Water Heater Users', Facebook page, we'd love to see them!

www.bobilvans.co.uk

@bobilvans



©2024 Bobil Vans Ltd

Registered in England. Company no: 13307438. VAT reg no: 376 3711 79.